



XS LINEAR BAR

XS TRACK

The very thin linear luminaire with diffused light that stands out for its small dimensions and discretion.

XS TRACK M19A/M19O/M19T/M19E



XS LINEAR BAR	10.010A03000
Power	6W
Beam angle	110°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	79lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	SMD




XS LINEAR BAR	10.010A06000
Power	12W
Beam angle	110°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	80lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	SMD



XS LINEAR BAR	10.010A12000
Power	23W
Beam angle	110°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	83lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	SMD



OPTIONS	
1	Non-DIM

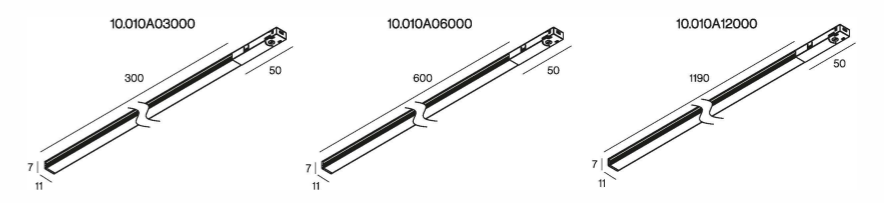

COLOUR | BK ■ WH □ | MATERIAL | PC