



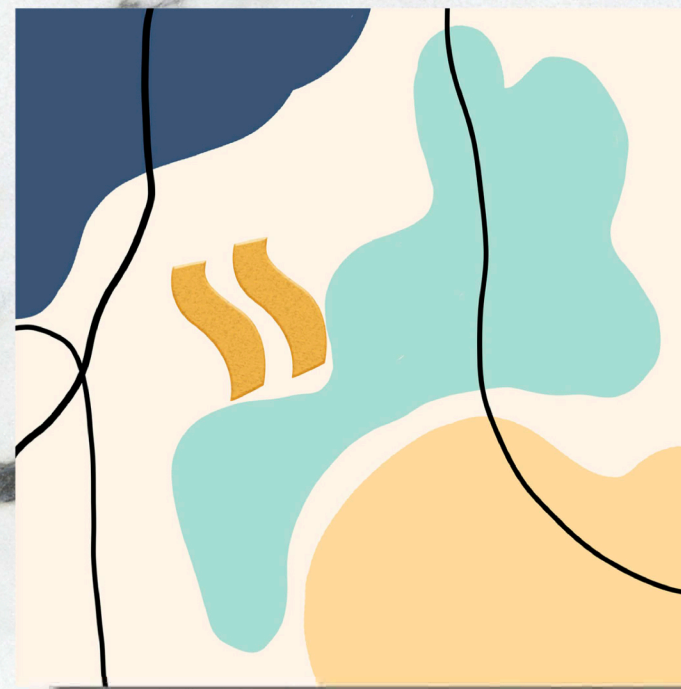

LINEAR 

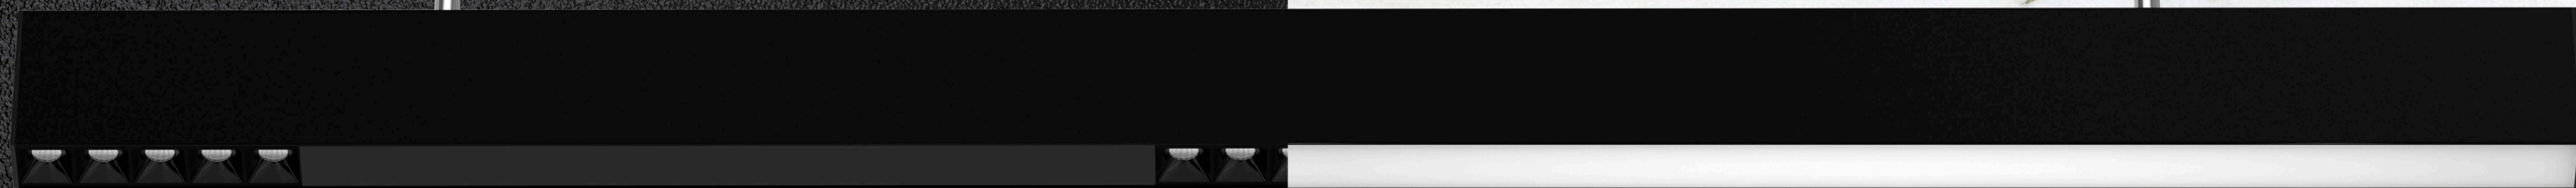

Linear


Linear Surface/Suspended



Code No.	Power	Beam angle	Color temperature	Light efficiency	LED Chip	CRI	SDCM	Size(mm)
04.001A12000	2×10W	22°/36°/45°	2700K/3000K/3500K/4000K/5000K	59lm/W	OSRAM	>90	<3	1200×34.5×75
04.001A12000	3×10W	22°/36°/45°	2700K/3000K/3500K/4000K/5000K	62lm/W	OSRAM	>90	<3	1200×34.5×75
04.001A15000	3×10W	22°/36°/45°	2700K/3000K/3500K/4000K/5000K	62lm/W	OSRAM	>90	<3	1500×34.5×75
04.001A20000	4×10W	22°/36°/45°	2700K/3000K/3500K/4000K/5000K	55lm/W	OSRAM	>90	<3	2000×34.5×75
04.001A24000	6×10W	22°/36°/45°	2700K/3000K/3500K/4000K/5000K	65lm/W	OSRAM	>90	<3	2400×34.5×75


OPTIONS

☒	Non-DIM
-------------------------------------	---------

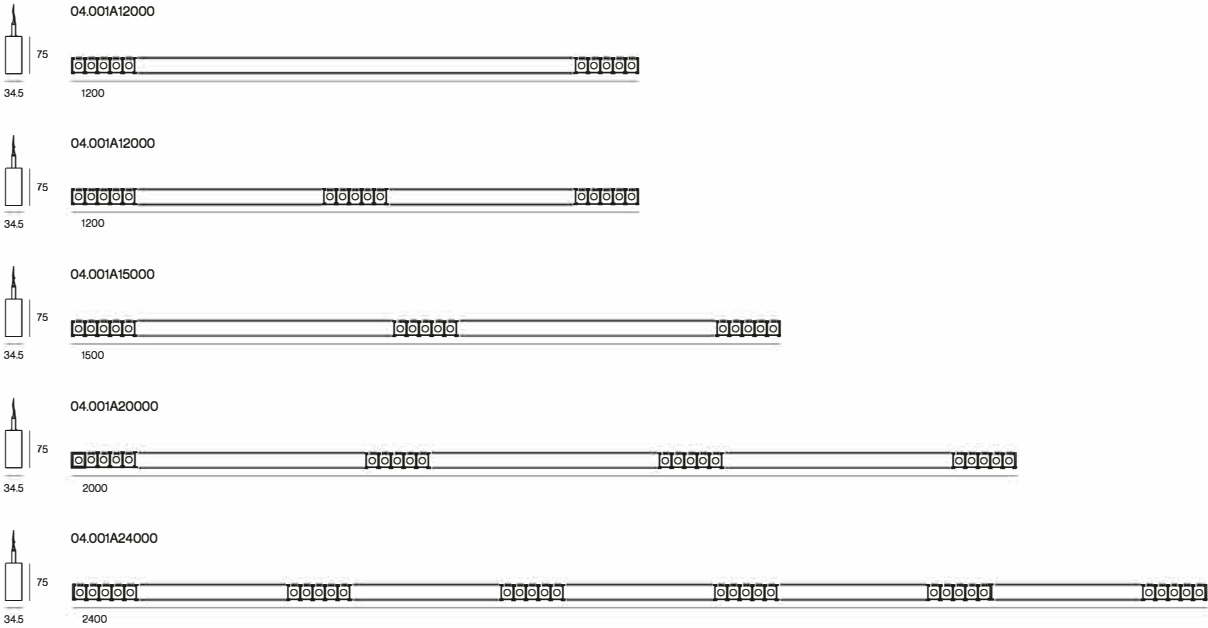

COLOUR | BK ■ WH □ SLV □ |

MATERIAL | AL |

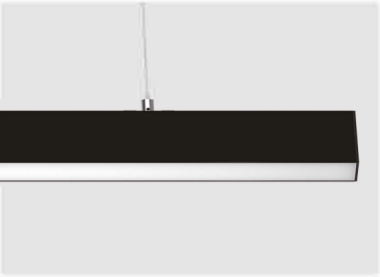

Linear


Linear Surface/Suspended



Code No.	Power	Beam angle	Color temperature	Light efficiency	LED Chip	CRI	SDCM	Size(mm)
04.001B12000	38W	112°	2700K/3000K/3500K/4000K/5000K	90lm/W	OSRAM	>90	<5	1200×34.5×75
04.001B15000	45W	112°	2700K/3000K/3500K/4000K/5000K	90lm/W	OSRAM	>90	<5	1500×34.5×75
04.001B18000	50W	112°	2700K/3000K/3500K/4000K/5000K	90lm/W	OSRAM	>90	<5	1800×34.5×75
04.001B20000	60W	112°	2700K/3000K/3500K/4000K/5000K	90lm/W	OSRAM	>90	<5	2000×34.5×75
04.001B24000	70W	112°	2700K/3000K/3500K/4000K/5000K	90lm/W	OSRAM	>90	<5	2400×34.5×75
04.001B30000	90W	112°	2700K/3000K/3500K/4000K/5000K	90lm/W	OSRAM	>90	<5	3000×34.5×75

OPTIONS

☒	Non-DIM
-------------------------------------	---------

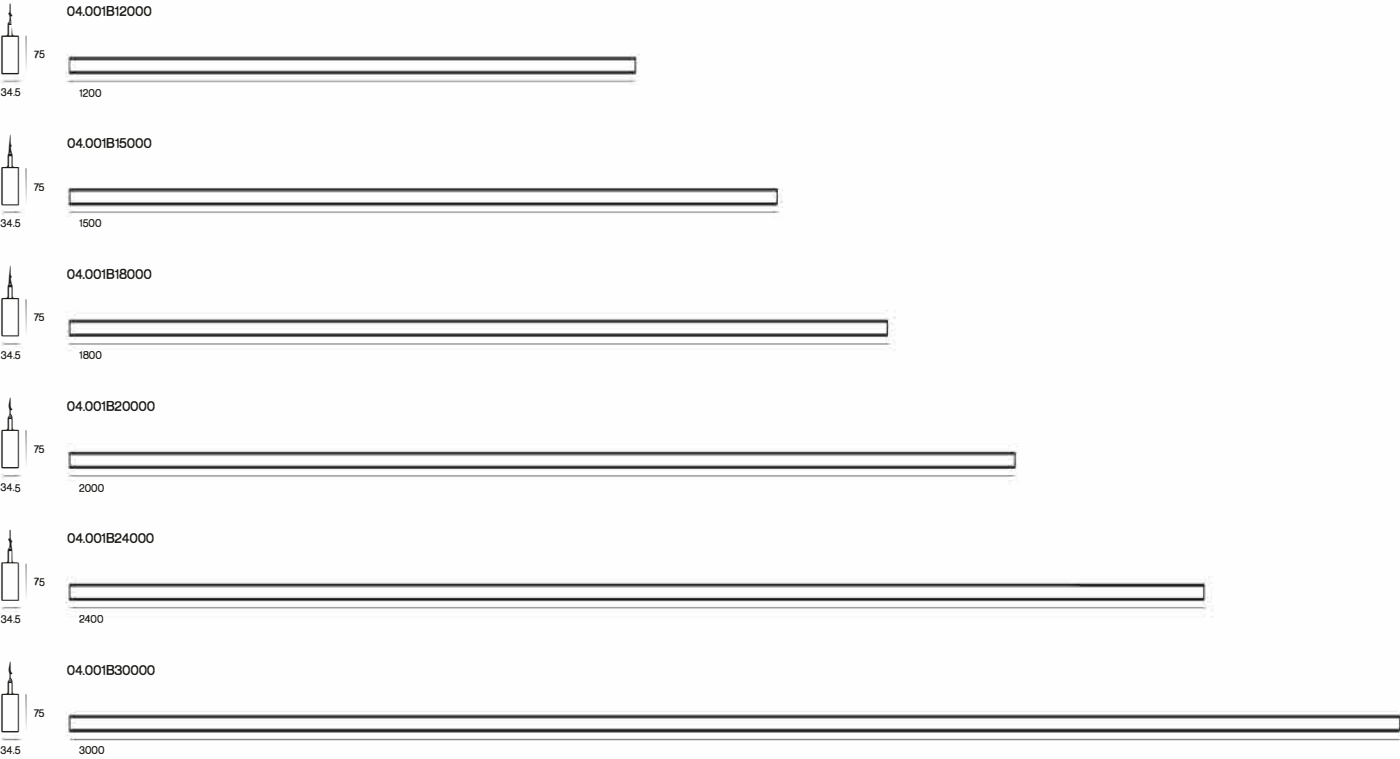

COLOUR | BK ■ WH □ SLV □ |

MATERIAL | AL |