





SMART PRO

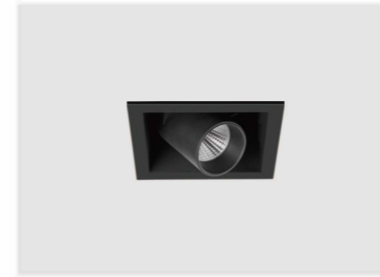

SMART PRO	01.833A01000
Power	20W
Beam angle	19°/25°/38°/52°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	91lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35.000-50.000h LM80
LED chip	COB







SMART PRO	01.833A02000
Power	2*20W
Beam angle	19°/25°/38°/52°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	91lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35.000-50.000h LM80
LED chip	COB



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE



01.833A01000

01.833A02000

COLOUR | BK ■ WH □

MATERIAL | AL