

XS IT22

XS TRACK



XS TRACK M19A/M19O/M19T/M19E



XS IT22	10.001A01000
Power	3W
Beam angle	18°/23°/35°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	60lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	SMD



XS IT28	10.002A01000
Power	5.3W
Beam angle	25°/31°/42°/56°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	87lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB




XS IT35	10.012A01000
Power	8W
Beam angle	22°/29°/37°/50°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	88lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



OPTIONS

1 Non-DIM

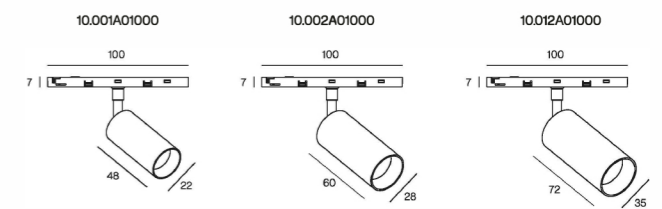

COLOUR | BK ■ WH □

MATERIAL | AL

It stands out for its mini size but high performance for accent lighting, flexible choice for its colors and beam angles, structural design balances aesthetics and functionality.

XS TRACK M19A/M19O/M19T/M19E



XS IT30


10.003A01000

Power	5.3W
Beam angle	18-31°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	36lm/W
Color rendering index	≥90
Operating temperature	-25°C - 50°C
Rated life hours	35,000-50,000h LM80
LED chip	COB



OPTIONS

1	Non-DIM
---	---------



COLOUR | BK ■ WH □

MATERIAL | AL